

DIMENSIONS



PROPERTIES

| UNIT SIZE | Standard | |
|-----------|----------------|-------------------|
| | Weight: | 20.4 kgs (45 lbs) |
| | Height to Rim: | N/A |
| | Total Height: | 843 mm (33 in) |
| Diameter: | | 495 mm (20 in) |

| MOTOR | 230V | |
|-------|---------------------------|------------------|
| | Watts* @ 50 htz: | 390 |
| | RPM* @ 50 htz: | 1,690 |
| | CFM* @ 50 htz (m3/hr): | 3,358 (5,705) |
| | AMPS* @ 50 htz: | 2.50 |

*Motor data provided by motor manufacturer and is subject to change at anytime

TITAN STANDARD SERIES RANGE - MODEL STANDARD 100/EC



COVERAGE

- Ceiling Height = 19.5m - 32m (64 - 105 ft)
- Nozzle Height = 18m - 30.5m (59 - 100 ft)
- Diameter = 15m - 19m (49 - 62.5 ft)
- Floor area = 186m² - 279m² (2,002 - 3,003 ft²)

MOTOR

- Single phase, electrically commutated, variable speed (with optional speed control), 92% efficient motor
- Sealed bearings, no lubrication required

OPERATING TEMPERATURES

- Operating Temp = -25°C (-13°F) to 60°C (140°F)
- Thermal shut off = 135°C (275°F)
- Reset = 125°C (255°F)

HOUSING

- ABS Resin housing and components
- 5VA flame resistance rating
- 1.8m (6') steel safety leash cable (fastened to housing)

NOISE LEVEL

- Floor Level = 0 - 34 dB(A)

INGRESS PROTECTION

- IP54 Rated

COLOUR

- Black as standard
- Can be tailor painted to your colour specifications

ACCESSORIES & OPTIONS


- Speed Controls - On/off speed controls allow for variable output from Airius unit. EC controls available

WARRANTY

- 5 years parts and workmanship from shipping date
- 120 day money back guarantee (T's & C's apply)

PROPERTIES

VELOCITY PROFILE

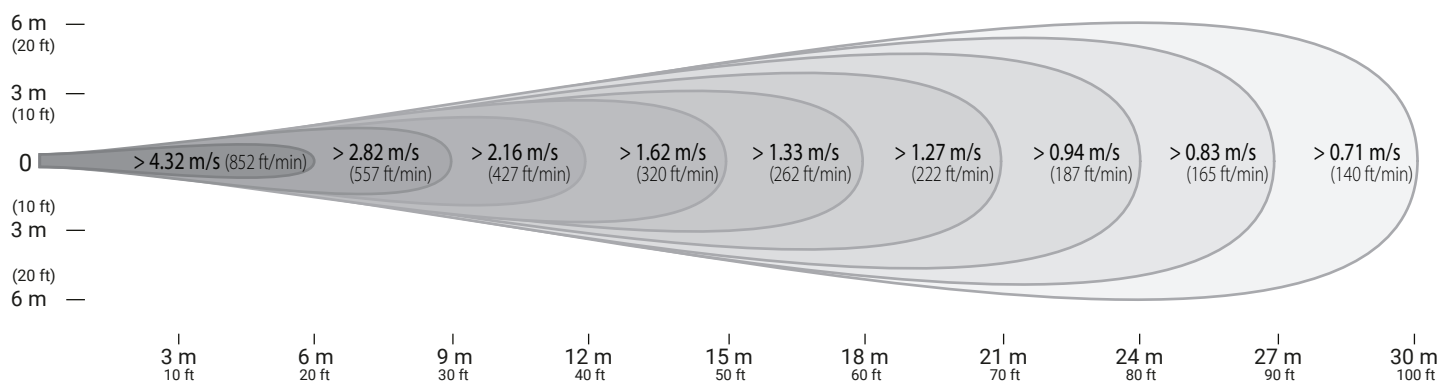


PLACEMENT

PREPARATION

- Install electrical circuit(s) and outlet(s) in accordance with national and local electric codes
- Outlets should generally be mounted vertically unless a "twist/locking" type is being used
- Wall switch may be installed in circuit to disable power and prevent electrical hazards when servicing
- Confirm electrical continuity of Airius unit on the ground before permanently mounting in the ceiling

INSTALLATION

- Hang vertically as high in the ceiling as possible. Typically 300mm (12") - 450mm (18") from the roof deck to intake
- The Airius unit performs best when air column from the nozzle is unimpeded to the floor
- Use professionally installed hardware, capable of supporting a minimum of five times the weight
- Hardware to hang the unit includes but is not restricted to: Hooks, chains, cables, carabiners, bridle rings, beam clamps and bolts
- Density of the placement is directly related to the effectiveness, performance and savings
- Mount out of reach from people and animals
- Floor plans, mezzanines, office locations, machinery, people placement, plumbing, lighting, duct work, electrical systems, natural light/air systems, cranes, doors, windows, ventilation and fire suppression systems are all factors in properly locating the Airius system within the ceiling

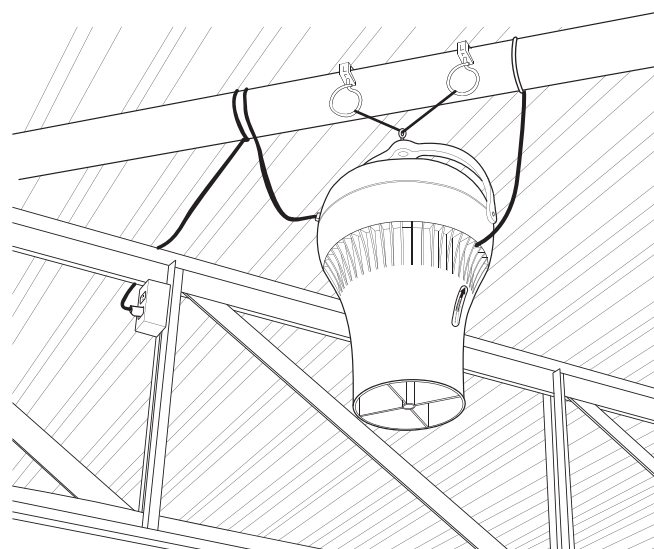

OPERATION

- Designed to operate 24 hours-a-day, 7 days-a-week to maintain thermal equalization/humidity equalization
- Use optional speed control to fine tune RPM if needed

MAINTENANCE

- Frequency of cleaning will vary by application and environment
- You may clean the plastic housing with a damp warm cloth, using mild household detergents
- Do not use petroleum products, thinners or solvents to clean any part of the Airius unit
- If the Airius unit fails, contact manufacturer

Airius LLC, © 2011. All Rights Reserved.